


EM60DS-FIRE

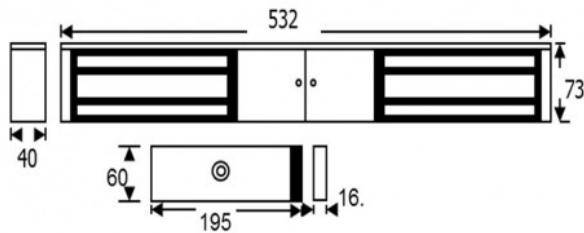

FIRE RATED DOUBLE STANDARD MAGLOCK WITH DOOR STATUS

Fire rated standard unmonitored double magnetic lock designed for indoor applications where 545kg holding force is required. This model includes door status monitoring contacts to monitor the door position (open or closed).

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 9.6kg approx.
- Reed switch door contact (one per side)

RELATED PRODUCTS

| | | | |
|---|---|---|---|
|  <p>EM40DS-FIRE</p> |  <p>EM500L-FIRE</p> |  <p>EM500ZL-FIRE</p> |  <p>SPB003S</p> |
|---|---|---|---|