


## EM05DS-FIRE

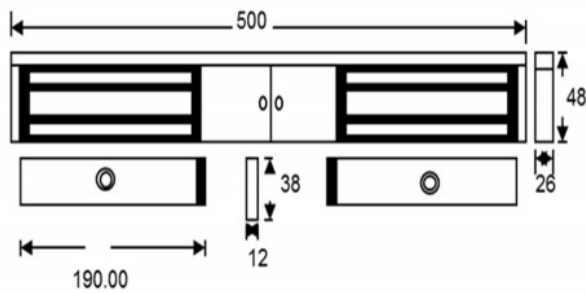

## FIRE RATED DOUBLE SLIM MONITORED MAGLOCK WITH DOOR STATUS

The compact design makes this lock ideal for most indoor applications where 275kg holding force is sufficient. LED lock monitoring and relay contacts for signalling. This fire rated model includes door status monitoring contacts to monitor each door position.

### FEATURES

- Fire rated
- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design; Surface mount
- Dual voltage 12Vdc or 24Vdc (selectable)
- Silver anodized aluminium finish
- Lock monitoring & door status monitoring

### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Reed switch door contact (one per side)
- Red/green LED indicator (one per side)
- Relay: COM/NO/NC (1A @ 24Vdc) (one per side)

## RELATED PRODUCTS



CP3-LSRC



EM01DS-FIRE



SPB003S



SPB004S