


## EM40-FIRE

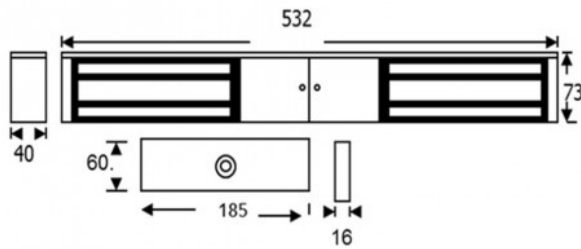

## STANDARD FIRE RATED MONITORED DOUBLE MAGLOCK 12/24VDC

Fire rated standard monitored double magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

### FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

### TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensing
- Weight: 9.6kg approx.
- Relay: COM/NO/NC (1A @ 24Vdc) (one per side)

## RELATED PRODUCTS

|  |   |   |   |
|--|---|---|---|
|  <p><b>EM40DS</b></p> |  <p><b>EM500CL</b></p> |  <p><b>EM520S</b></p> |  <p><b>NT200</b></p> |
|--|---|---|---|