


## EM01DS-ARM/SAFETY

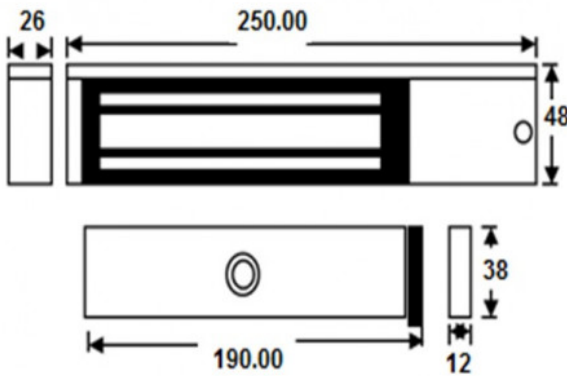

## SLIM UNMONITORED MAGLOCK WITH DOOR STATUS AND ARM STRAP

The compact design of this magnetic lock makes it ideal for most indoor applications where 275kg holding force is sufficient. This model includes door status monitoring contacts to monitor the door position (open or closed).

### FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design; Surface Mount
- Dual voltage 12Vdc or 24Vdc (selectable)
- Silver anodised aluminium finish
- Door status monitoring
- Includes Armature Safety Strap

### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 2kg approx.
- Reed switch door contact

## RELATED PRODUCTS



ARM/SAFETY-KIT



EM01DS



EM01DS-FIRE