


## EM05-ARM/SAFETY

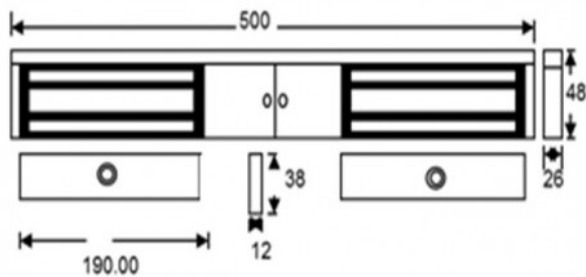

### DOUBLE MINI MAGNET SURFACE MOUNT MON WITH ARM STRAPS

Slim monitored double magnetic lock for double doors. Compact design making it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling.

#### FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design; Surface mount
- Dual voltage 12Vdc or 24Vdc (selectable)
- Silver anodized aluminium finish
- Lock monitoring and Door status monitoring

#### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Reed switch door contact (one per side)
- Red/green LED indicator (one per side)
- Relay: COM/NO/NC (1A @ 24Vdc) (one per side)