

EM07




**MIDI MONITORED SINGLE MAGLOCK  
12/24VDC**

Midi single lock-monitored magnetic lock. Up to 364kg holding force for indoor applications. Monitoring provides LED lock status indication and relay contacts for signalling.

**FEATURES**

- Dual voltage
- Surface mount
- Current draw: 500mA @ 12Vdc/ 250mA @ 24Vdc
- Top plate, armature and fixings included
- Silver anodised aluminium
- Lock monitored
- Door status monitoring available
- Up to 364kg (800lb) holding force

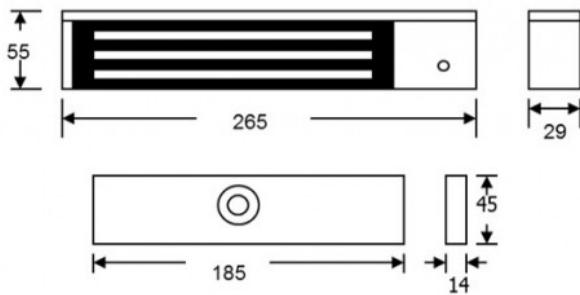

**TECHNICAL INFORMATION**

- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non condensating
- Weight: 3kg approx.
- Relay: COM/NO/NC (1A@24Vdc)

**RELATED PRODUCTS**

|   |  |  |  |
|---|--|--|--|
|  <p><b>EM06S</b></p> |  <p><b>EM07DS</b></p> |  <p><b>EM850ZL</b></p> |  <p><b>PSU3A-12</b></p> |
|---|--|--|--|