

**EM08**




**MIDI MONITORED DOUBLE MAGLOCK  
12/24VDC**

Double midi lock-monitored magnetic lock. Up to 365kg holding force for indoor applications. Monitoring provides LED lock status indication and relay contacts for signalling.

**FEATURES**

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage, 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodized aluminium finish

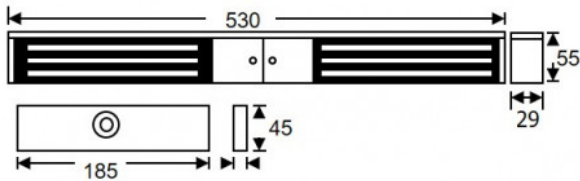

**TECHNICAL INFORMATION**

- Holding force: up to 364kg (800lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc (each side)
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non condensating
- Weight: 6kg approx.
- Relay: COM/NO/NC (1A@24Vdc)

**RELATED PRODUCTS**

 <p><b>EM08DS</b></p>	 <p><b>EM850L</b></p>	 <p><b>KGG300SG-LSRC</b></p>	 <p><b>SPB020S</b></p>
--	--	--	---