

## EM10



### STANDARD UNMONITORED MAGLOCK 12/24VDC


Standard single unmonitored magnetic lock designed for indoor applications where 545kg holding force is required.

#### FEATURES

- Unmonitored
- Dual voltage
- Surface mount
- Silver with anodised aluminium
- Current draw: 500mA @ 12Vdc/ 250mA @ 24Vdc
- Holding force: up to 545kg (1200lb)

#### TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4.8kg approx.

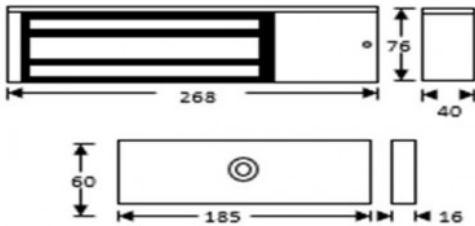

## RELATED PRODUCTS

|                                                                                                        |                                                                                                   |                                                                                                       |                                                                                                     |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|  <p>DU04-CP3LSRC</p> |  <p>EM10DS</p> |  <p>EM500AZLG</p> |  <p>EM500L</p> |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|