

## EM20




### STANDARD MONITORED MAGLOCK 12/24VDC

Standard single monitored magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

#### FEATURES

- Lock monitoring
- Dual voltage
- Surface mount
- Silver with anodised aluminium
- Current draw: 500mA @ 12Vdc/ 250mA @ 24Vdc
- Holding force: up to 545kg (1200lb)

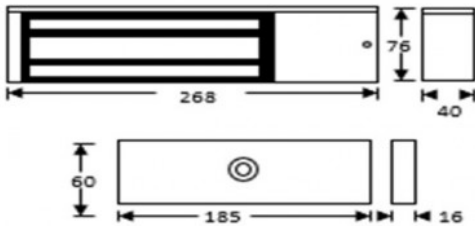

#### TECHNICAL INFORMATION

- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4.8kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)

## RELATED PRODUCTS



CP3-LSRC-DB



EM20-FIRE



EM500AZLG-DC



EM20-ECO