


EM60-ARM/SAFETY

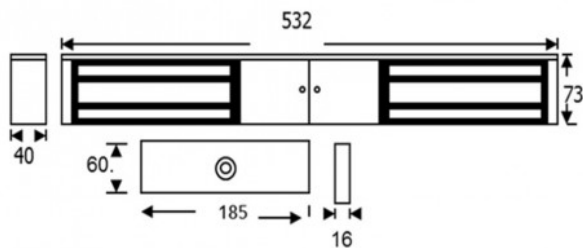

DOUBLE STANDARD MAGLOCK SURFACE MOUNT 12/24VDC

Standard unmonitored double magnetic lock designed for indoor applications where 545kg holding force is required.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 9.6kg approx.

RELATED PRODUCTS

 <p>EM500AZLG</p>	 <p>EM500L</p>	 <p>EM60DS</p>	 <p>NT200</p>
-------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------