

## EXT1200





### STANDARD MONITORED S/STEEL WEATHERPROOF MAGLOCK 12/24VDC

Weatherproof stainless steel standard monitored external magnetic lock. Where up to 545kg of holding force is required its weatherproof construction and 20mm female conduit connection make it ideal for outdoor use (e.g. gates).

#### FEATURES

- Weatherproof
- Lock monitored
- Side and face fixing
- Budget
- Stainless steel
- 12Vdc current consumption with 500mAmp current draw
- 24Vdc current consumption with 250mAmp current draw
- Up to 540kg holding force
- 20mm female conduit fitting

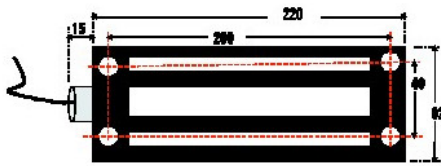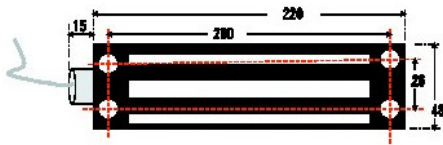

#### TECHNICAL INFORMATION

- Voltage Tolerance: +/-15%
- Current Draw: 500mA@12Vdc : 250mA@24Vdc
- Magnetic bond sensor monitor output (00R) (SPDT RATED 0.25A@12VDC, remotely monitors the door lock or unlock status of magnet
- Operating Temperature: -10~55C (14~131F)
- Holding Force Up to 1200lbs (545kg)
- Dimensions: Magnet (L)220. (W)62. (D)40mm, Armature: (L)185. (W)62. (D)16mm
- Epoxy Potting Compound: E87252 (S), UL94V-0
- Weight (approx) : 4.8kg
- IP68 rated

## RELATED PRODUCTS



**DG500**



**EM500ZLW**



**EXT800**



**SPB008(S)**