

## SL705-30

### 30MM WIDE MONITORED SHEARLOCK ADJUSTABLE LOCKING PIN



This monitored shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

#### FEATURES

- Lock monitored
- Hall effect (more precise monitoring)
- 30mm wide face plate
- Mortice fitting
- Dual voltage
- Horizontal or vertical installation

#### TECHNICAL INFORMATION

- Voltage 12-24Vdc (auto-selectable)
- Current Draw:  
Pull-in current: 1.7A @ 12 Vdc; 1.1A @ 24 Vdc  
Holding current: 500mA @ 12 Vdc; 320mA @ 24 Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 30 Vdc
- Holding Force: Up to 909kg (2000 lbs) in shear
- Permissible gap between lock and armature plate = 3mm max
- Weight : 1.8 kg approx

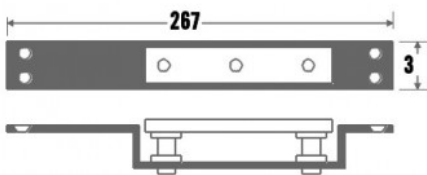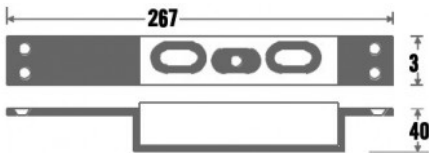

## RELATED PRODUCTS



**GS200M**



**SL183**



**SL705-35**